




Chemvet

Steel & Fencing

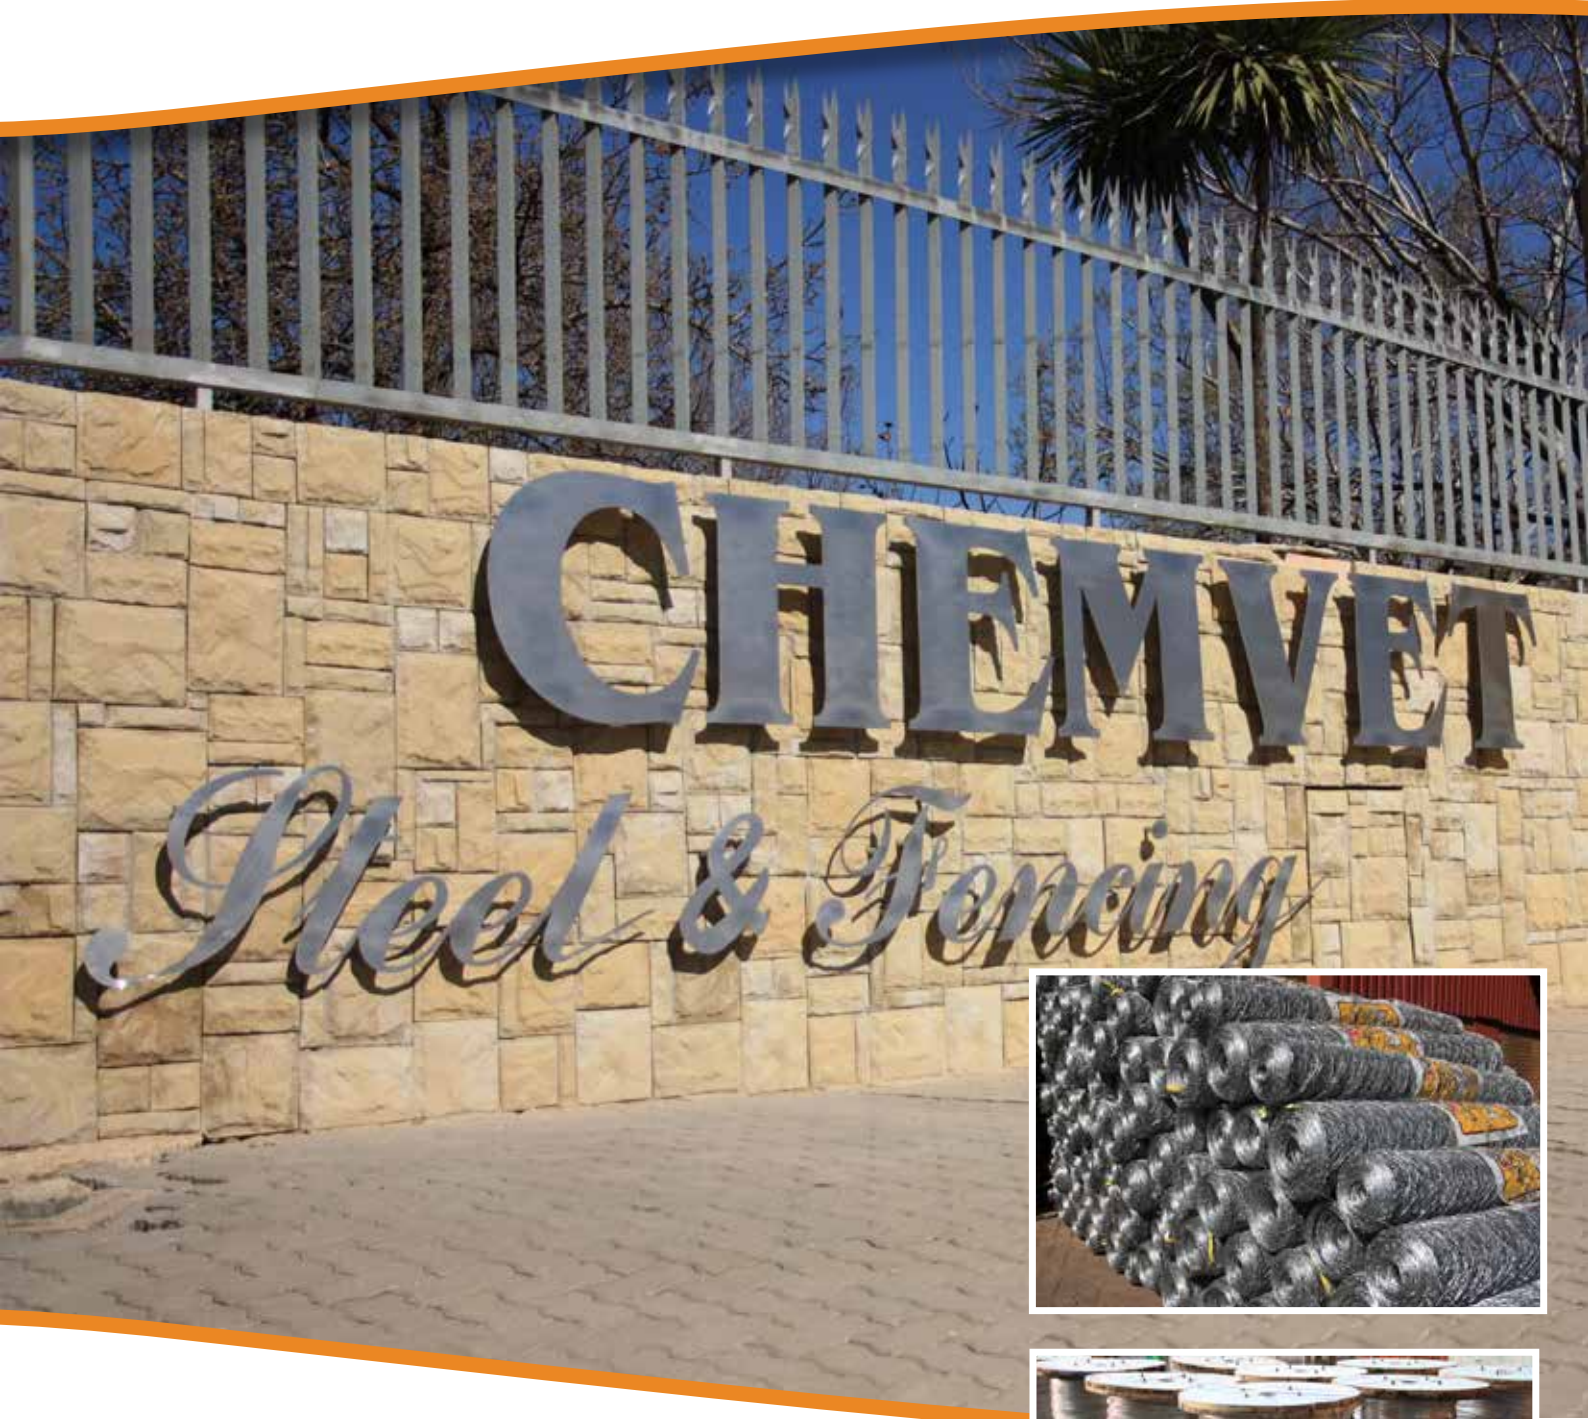

**FENCING
CATALOGUE**

Fencing Products

Wire

Welded Mesh
Binding
Barbed Wire
Diamond Mesh
Netting Wire
Fieldfence
Razorwire

Flatwrap
Concertina
Razormesh

Posts and Stays

Corner Posts
Straining Posts
Intermediate Posts
Security Posts
Stays
Cross Braces

Y-Standard & Droppers

Y-Standards
I-Standards
Security Y-Standards
Ridgeback Mittal Droppers

Gates

Farm Gates
Auction Gates
Sliding Gates
Lion Gates
Lion Gates D/Mesh
Diamond Mesh

Single

Double





Welded Mesh



Binding

Specifications:

Roll Height	Mesh Size	Wire Diameter
1.22M	25 X 13MM	1.6MM
1.22M	25 x 25MM	1.6MM
1.22M	50 X 25MM	2.5MM
1.22M	50 X 50MM	1.6MM
1.22M	50 X 50MM	2.0MM
1.22M	50 X 50MM	2.5MM
1.22M	50 X 50MM	2.0V X 2.5H
1.22M	100 X 50MM	2.0V X 2.5H
1.83M	25 X 25MM	1.6MM
1.83M	50 X 13MM	1.6MM
1.83M	50 X 25MM	1.6MM
1.83M	50 X 25MM	2.5MM
1.83M	50 X 50MM	1.6MM
1.83M	50 X 50MM	2.5MM
1.83M	50 X 50MM	3.15MM
1.83M	100 X 50MM	2.0V X 2.5H
1.83M	100 X 100MM	2.5MM
2.42M	50 X 50MM	2.5MM
2.42M	100 X 50MM	2.0V X 2.5H
2.42M	100 X 75MM	2.5MM

Specifications:

Wire Diameter:	Metres / Roll	Kg / Roll	Available in:
1.6mm	317m	5kg.	Lightly Galvanised
1.6mm	3175m	50kg.	Lightly and Fully Galvanised
2mm	210m	5kg.	Lightly Galvanised
2mm	2100m	50kg.	Lightly and Fully Galvanised
2.5mm	130m	5kg.	Lightly Galvanised
2.5mm	1300m	50kg.	Lightly and Fully Galvanised
3.15mm	81m	5kg.	Lightly Galvanised
3.15mm	810m	50kg.	Lightly and Fully Galvanised
4mm	50m	5kg.	Lightly Galvanised
4mm	500m	50kg.	Lightly and Fully Galvanised

Barbed Wire



Diamond Mesh



Single Barbed:

	Metres / Roll	Kg / Roll	Wire diameter	Available in	Recommended Tension
Karoo 1 (K1)	845m	35kg.	2.80 X 1.90	Lightly and Fully Galvanised	± 227kg (2.23kN)
Karoo 1 (K1)	515m	35kg.	3.15 X 2.50	Lightly and Fully Galvanised	± 249kg (2.46kN)

Double Barbed:

	Metres / Roll	Kg / Roll	Wire diameter	Available in	Recommended Tension
Iowa	800m	50kg.	2 X 2.0mm	Lightly Galvanised	± 178kg (1.75kN)
Iowa	540m	50kg.	2 X 2.5mm	Lightly Galvanised	± 204kg (2.00kN)
Karoo 2 (K2)	845m	35kg.	2 X 1.6mm	Lightly and Fully Galvanised	± 178kg (1.75kN)

Chain Link Fencing

Galvanised Coating: Fully or Lightly Galvanized
 Wire Diameters: 2.0mm, 2.5mm (Standard)
 3.15mm, 4.0mm (Non-standard)

Mesh Sizes: 50mm, 64mm, 75mm

Roll widths: Available in widths ranging from 900mm to 3000mm

IMPORTANT:

Following erection of a fence, the individual wire should be tensioned to the recommended tension with suitably approved wire strainers and Tensiometer, which are available from Chemvet. The use of motor vehicle or tractors to tension wires is NOT recommended.

Netting Wire



Netting wire is usually utilised as a means of excluding vermin (e.g. jackals, rabbits etc.) and at the same time, controlling domesticated animals (e.g. birds, small and large chickens)

Specifications:

Height	Aperture	Wire Diameter	Roll length
300mm	13mm	0.71mm	50m
600mm	13mm	0.71mm	50m
900mm	13mm	0.71mm	50m
1200mm	13mm	0.71mm	50m
1500mm	13mm	0.71mm	50m
1800mm	13mm	0.71mm	50m
600mm	25mm	0.9mm	50m
900mm	25mm	0.9mm	50m
1200mm	25mm	0.9mm	50m
1500mm	25mm	0.9mm	50m
1800mm	25mm	0.9mm	50m
600mm	50mm	1.0mm	50m
900mm	50mm	1.0mm	50m
1200mm	50mm	1.0mm	50m
1500mm	50mm	1.0mm	50m
1800mm	50mm	1.0mm	50m
300mm	75mm	1.8mm	50m
600mm	75mm	1.8mm	50m
900mm	75mm	1.8mm	50m
1200mm	75mm	1.8mm	50m
1500mm	75mm	1.8mm	50m
1800mm	75mm	1.8mm	50m
300mm	90mm	1.8mm	50m
600mm	90mm	1.8mm	50m
900mm	90mm	1.8mm	50m
1200mm	90mm	1.8mm	50m
1500mm	90mm	1.8mm	50m
1800mm	90mm	1.8mm	50m

Recommended Application

Birds

Chicken

Fowl

Jackal


Pig

Veldspan / Fieldfence



Specifications:

	Lambs	Sheep	Goat	Pigs	Cattle	Boundary	Security	Large Game	Small Game
6-90-30/15		x		x					
9-99-30/15	x	x	x	x		x			
8-115-30/15		x	x	x	x	x			
10-115-30/15	x	x	x	x	x	x			
13-188-30/15							x	x	x
14-211-30/15							x	x	

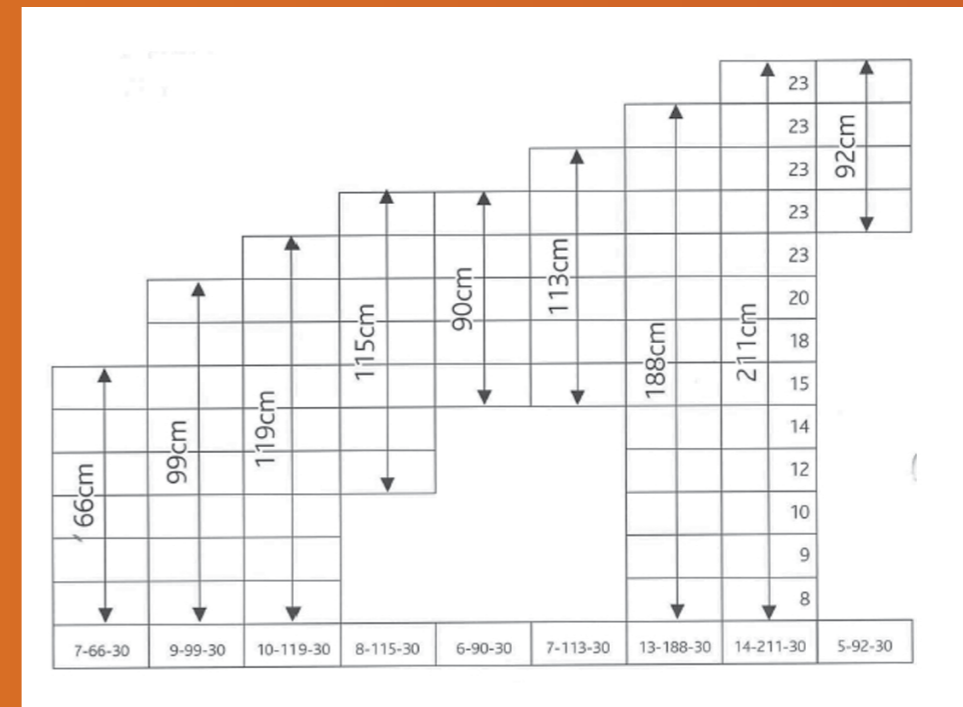

Razor Wire



Concertina



Available Heights:

450mm X 10/12m
730mm X 12m
980mm X 14m

Flat Wrap



Available Heights:

500mm X 15m
700mm X 15m
900mm X 15m

Razormesh



Available Heights:

1.2m, 1.8m, 2.1m, 2.4m
Length: 6m Sheet

Posts and Stays

- Corner Posts
- Straining Posts
- Intermediate Posts
- Security Posts
- Stays
- Cross Braces



Y-Standard & Droppers

- Y-Standards
- I-Standards
- Security Y-Standards
- Ridgeback Mittal Droppers



Chemvet has it's own in-house manufacturing department.

We can manufacture any posts and stays according to customers specifications.

Material can either be painted or sent to authorised galvanisers for hot dip galvanising.

YP 2 kg/m	Holes	50-60mm apart for binding wire, not recommended for lacing or stringing.
	Application	Light agricultural, roads and domestic fencing.
	Finish	Black coated as standard, but can be supplied uncoated for galvanising.
	Apertures	25mm apart for line wire spacing.
	Range	1,4m to 2,45m.

IP 3 kg/m	Holes	50-60mm apart for binding wire, not recommended for lacing or stringing.
	Application	Light agricultural, roads, domestic fencing. Suitable for rocky terrain.
	Finish	Black coated as standard, but can be supplied uncoated for galvanising purposes. One end sharpened.
	Apertures	None.
	Range	1,4m to 3,05m

Securilec YP 2,1 kg/m	Holes	50-60mm apart for binding wire, not recommended for lacing. Suitable for plastic bobbins.
	Application	Electric fencing.
	Finish	Black coated as standard, but can be supplied uncoated for galvanising purposes.
	Apertures	25mm apart.
	Range	2,45m and 3,05m.

YP 2,3 kg/m	Holes	50-60mm apart for binding wire not recommended for lacing or stringing.
	Application	Game fencing.
	Finish	Black coated as standard but can be supplied uncoated for galvanising purposes.
	Apertures	25mm apart for line wire spacing.
	Range	3,05m to 3,6m.

Ridgeback droppers 0,58 kg/m	Application	Line wire spacing of light agricultural, roads, domestic and game fencing.
	Finish	Black coated as standard.
	Apertures	10mm apart on back, 13mm on front.
	Range	0,95m to 2,45m.

Gates

- Farm Gates
- Auction Gates
- Sliding Gates
- Lion Gates
- Lion Gates D/Mesh

Diamond Mesh


- Single
- Double



Farm Gates


Sizes	Heights	
.900	3.0m	.900mm
1.2m	3.6m	1.2m
1.5m	4.2m	
1.8m	4.8m	
2.4m	5.4m	
2.7m		

Medium gates = 28mm tubing with 2.0mm vertical wire
Heavy gates = 42mm tubing with 2.5mm vertical wire

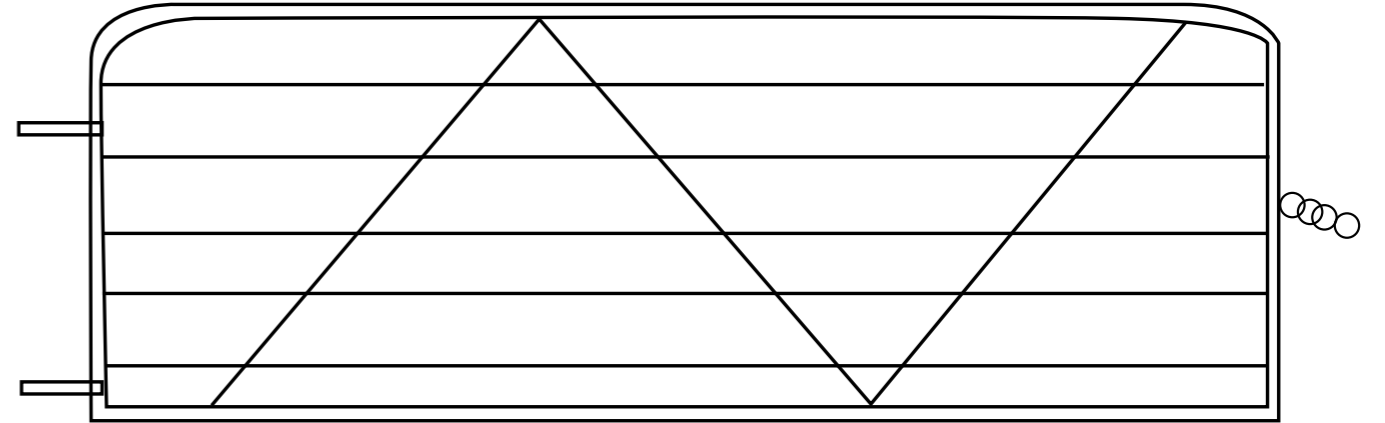

Auction Gates

Sizes	Heights	
3.0m x 1.2m	1.2m	42mm Tubing with 25x5 flatbar (6 vertical supports)
3.6m x 1.2m		2x eyebolts with chain
4.2m x 1.2m		
4.8m x 1.2m		

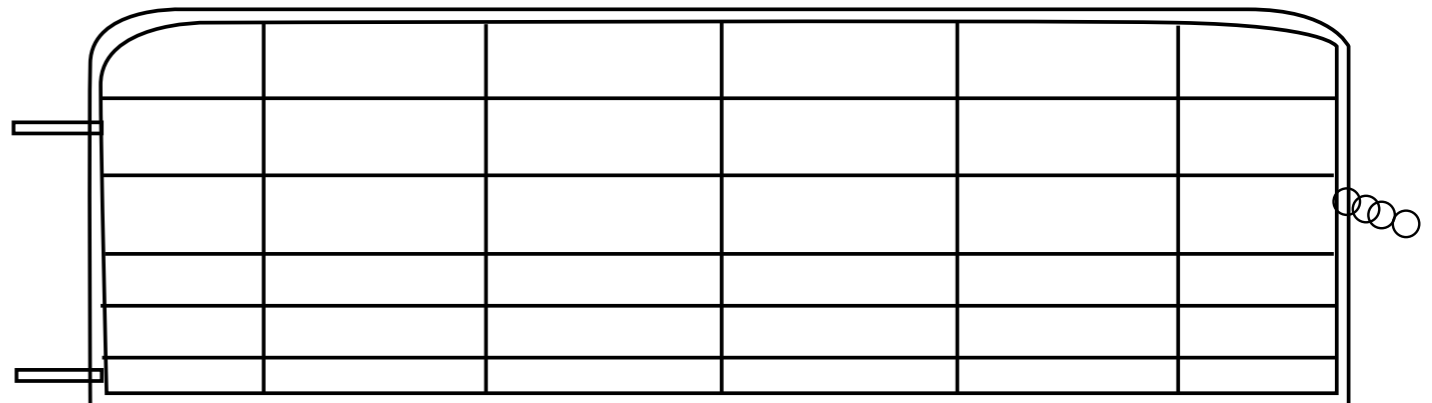

Sliding Gates



Sliding gates are manufactured to customers requirements.

Diamond Mesh Gates



Lion Gates



Lion crutches can be manufactured to customers specification.

Lion Gates D/Mesh

Heavy duty Diamond Mesh covered gate.




Strong and covered with 64mm x 2.5 mm Diamond Mesh.

Diamond Mesh - Single

Sizes		Heights	42mm tubing/ with chain/ x2 eyebolts covered with 64mm x 2mm mesh
1.2m	3.6m	1.2m	
1.8m	4.2m	1.8m	
2.4m	4.8m	2.4m	
3.0m	6.0m		

Diamond Mesh - Double

Sizes		Heights	42mm tubing/ with chain/ x2 eyebolts covered with 64mm x 2mm mesh
3.0m	5.0m	1.2m	
3.6m	6.0m	1.8m	
4.2m	8.0m	2.4m	
4.8m			

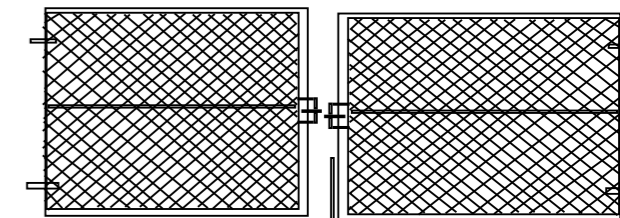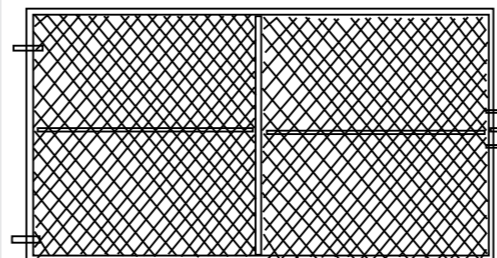



Contact Us

Tel: +27 11 437-9000

Fax: +27 11 872-1845

Physical Address:

1 Graphite Street, Driehoek, Germiston,
Gauteng, South Africa

Postal Address:

P.O Box 86142, City Deep, 2049